


Self-Locking Mini Squeezed Nut TR-UL/TR-FE/TR-FEO

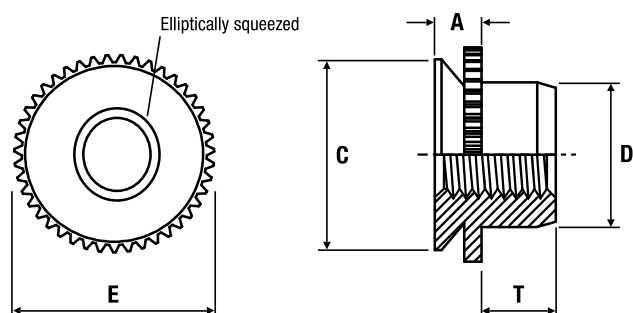

Metric Dimensions (TR-UL)

Stainless Steel: TR-UL/TR-FE/TR-FEO

Thread	M2
E ± 0.13	4.07
A (shank) max.	0.76
C -0.13	3.60
D max.	2.50
T $+0.4$	1.65
Sheet thickness	0.76 - 0.91
Recommended hole size $+0.08$	3.61
Min. distance to edge of sheet	2.80

Metric Dimensions (TR-FE/TR-FEO)

Thread		M3	M4	M5	M6
E ± 0.13		4.88	8.17	8.17	9.74
A (shank) max.	FE	1.53	1.53	1.53	1.53
	FEO	1.02	1.02	1.02	1.02
C -0.13		4.37	7.37	7.37	8.72
D max.		3.96	5.23	6.48	7.72
T $+0.4$		1.9	2.55	3.05	3.3
Sheet thickness	FE	1.5 - 1.78	1.5 - 1.78	1.5 - 1.78	1.5 - 1.78
	FEO	0.99 - 1.14	0.99 - 1.14	0.99 - 1.14	0.99 - 1.14
Hole size in sheet $+0.08$		4.39	7.39	7.39	8.74
Min. distance to edge of sheet		3.6	5.2	5.2	7.1

TR-U - Recommended for use in sheet hardness: HRB 70 or less
 TR-FE - Recommended for use in sheet hardness: HRB 70 or less

TR-FEO - Recommended for use in sheet hardness: HRB 70 or less

