


# Locking Nut TR-LK/TR-LKS

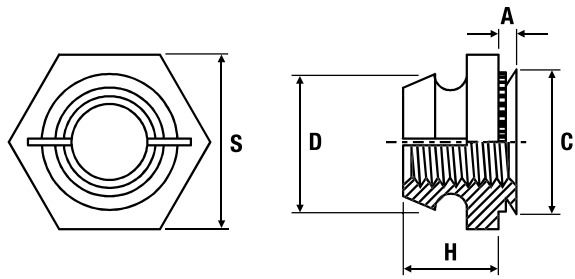

## Metric Dimensions

Zinc Plated Steel: TR-LK | Stainless Steel: TR-LKS

Thread	M2.5		M3		M4		M5	
Shank code	1	2	1	2	1	2	1	2
A shank max.	0.97	1.38	0.97	1.38	0.97	1.38	0.97	1.38
Min. sheet thickness	1.0	1.4	1.0	1.4	1.0	1.4	1.0	1.4
Recommended hole size +0.08	4.37		4.75		6.76		7.92	
C max.	4.35		4.73		6.73		7.90	
D max.	4.45		4.85		6.20		7.40	
S nom.	6.35		6.35		8.73		9.53	
H ±0.25	3.43		3.43		4.45		5.21	
Min. distance to edge of sheet	3.90		4.00		5.20		5.60	

## Metric Performance Data

Thread	M2.5		M3		M4		M5	
Shank code	1	2	1	2	1	2	1	2
Test sheet material	Steel							
Installation (kN)	13.3	13.3	13.3	13.3	17.8	19.1	17.8	19.1
Push-out (N)	667	711	667	1112	845	1334	1112	1334
Torque-out (Nm)	2.3	2.3	3.4	4.5	5.6	7.9	11.3	13.6

TR-LK - Recommended for use in sheet hardness: HRB 70 or less

TR-LKS - Recommended for use in sheet hardness: HRB 70 or less

