


Self-Locking Mini Squeezed Nut TR-UL/TR-FE/TR-FEO

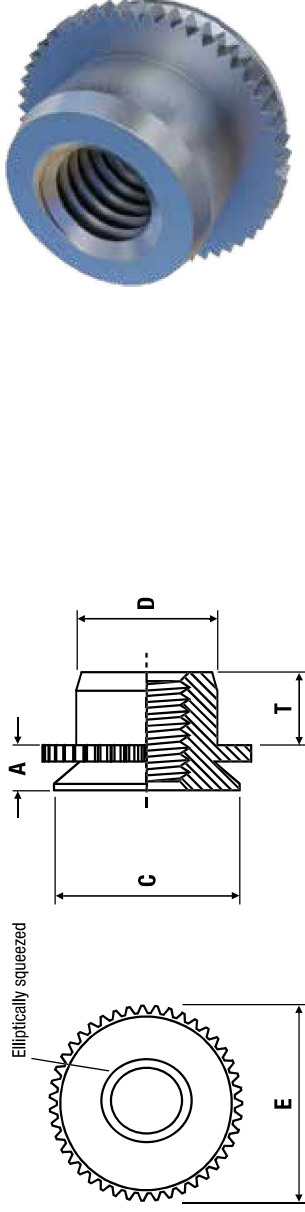

Metric Dimensions (TR-UL)

Stainless Steel: TR-UL/TR-FE/TR-FEO

Thread	M2
E ± 0.13	4.07
A (shank) max.	0.76
C -0.13	3.60
D max.	2.50
T $+0.4$	1.65
Sheet thickness	0.76 - 0.91
Recommended hole size $+0.08$	3.61
Min. distance to edge of sheet	2.80

Metric Dimensions (TR-FE/TR-FEO)

Thread	M3	M4	M5	M6