


# Non-Locking H Nut TR-H

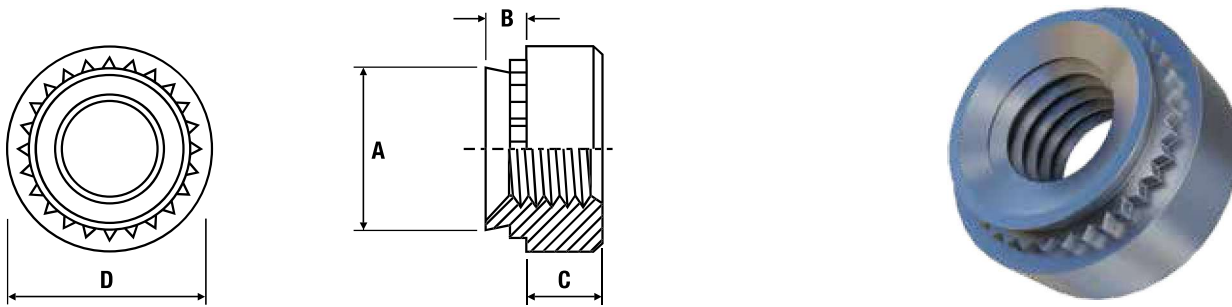

## Metric Dimensions

Stainless Steel: TR-H

Thread	<b>M10</b>
A	12.67
B	1.48
C	7.9
D	16.5
Min. sheet thickness	1.48
Recommended hole size +0.08	12.7 - 12.83
Min. distance to edge of sheet	12

## Metric Performance Data

Thread	<b>M10</b>
Test sheet material	Steel
Installation (kN)	33
Push-out (N)	2020
Torque-out (Nm)	27.1

TR-H - Recommended for use in sheet hardness: HRB 80 or less

