


Thread Lock Feature Nut TR-SL

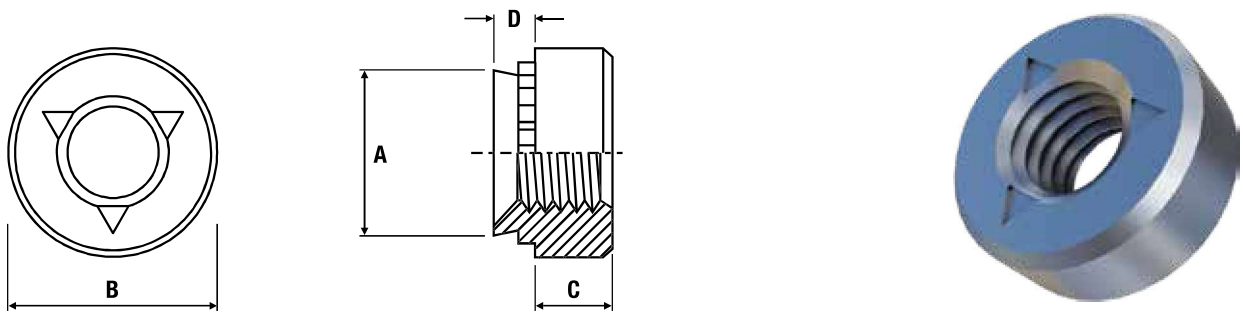

Metric Dimensions

Zinc Plated Steel: TR-SL

Thread	M3		M3.5		M4		M5		M6		M8	
Length code	1	2	1	2	1	2	1	2	1	2	1	2
A	4.2		4.73		5.38		6.33		8.73		10.47	
B	6.35		7.11		7.87		8.64		11.18		12.7	
C	1.5		1.5		2.0		2.0		4.08		5.47	
D	0.98	1.38	0.98	1.38	0.98	1.38	0.98	1.38	1.38	2.21	1.38	2.21
Min. sheet thickness	1.0	1.4	1.0	1.4	1.0	1.4	1.0	1.4	1.4	2.3	1.4	2.3
Recommended hole size +0.08	4.22		4.75		5.41		6.35		8.75		10.5	
Min. distance to edge of sheet	4.8		5.6		6.9		7.1		8.6		9.7	

Metric Performance Data

Thread	M3		M3.5		M4		M5		M6		M8	
Length code	1	2	1	2	1	2	1	2	1	2	1	2
Test sheet material	Steel											
Installation (kN)	11.2 - 15.6		13.4 - 26.7		18.0 - 27.0		18.0 - 38.0		27.0 - 36.0		27.0 - 36.0	
Torque-out (Nm)	1.7	2.03	2.3	2.3	4.0	5.1	4.5	6.8	17.0	17.0	18.7	20.3
Push-out (N)	550	1010	570	1210	645	1250	800	1112	1760	1760	1870	1870

TR-SL - Recommended for use in sheet hardness: HRB 80 or less

