
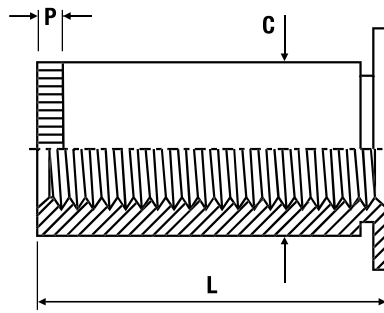


Grounding Standoff TR-SOSG



Metric Dimensions

Stainless Steel: TR-SOSG

| | | | | | | |
|--------------------------------|-----------|--|--|--|--|--|
| Thread | M3 | | | | | |
| C ± 0.13 | 5.39 | | | | | |
| D nom. | 6.4 | | | | | |
| Min. sheet thickness | 1.0 | | | | | |
| P knurling | 0.76 | | | | | |
| Recommended hole size +0.08 | 5.4 | | | | | |
| Min. distance to edge of sheet | 6.8 | | | | | |

| | | | | | | |
|------------------|---|---|---|---|----|----|
| Length (L) ±0.13 | 3 | 4 | 6 | 8 | 10 | 12 |
|------------------|---|---|---|---|----|----|

TR-SOSG - Recommended for use in sheet hardness: HRB 70 or less

