


Slotted Panel Fastener TR-PFS2/TR-PFC2

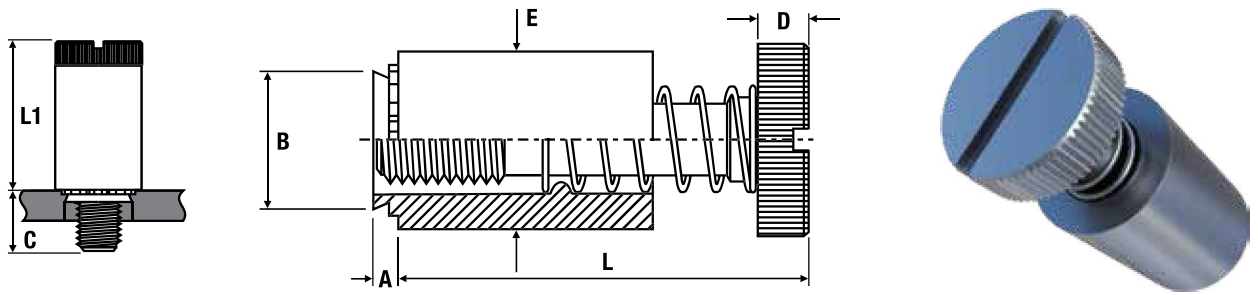

Metric Dimensions

Zinc Plated Steel: TR-PFS2 | Stainless Steel: TR-PFC2

Thread	M3		M4			M5			M6		
Screw length code	40	62	50	72	94	50	72	94	60	82	04
A max.	1.53		1.53			1.53			1.53		
B max.	6.71		7.9			8.72			10.47		
C ±0.4	6.4	9.5	7.9	11.1	14.3	7.9	11.1	14.3	9.5	12.7	15.9
D ±0.13	1.83		2.08			2.08			2.46		
E ±0.25	7.92		9.53			10.31			11.89		
L nom.	13.72		17.53			17.53			22.35		
L1 max.	9.14		11.43			11.47			14.73		
Min. sheet thickness	1.53		1.53			1.53			1.53		
Recommended hole size +0.08	6.73		7.90			8.74			10.49		
Screw protrusion before installation ±0.64	0	3.2	0	3.2	6.4	0	3.2	6.4	0	3.2	6.4
Min. distance to edge of sheet	6.35		7.87			8.63			9.65		

Metric Performance Data

Thread	M3	M4	M5	M6
Test sheet material	Steel			
Installation (kN)	13.4	17.0	17.9	22.3
Push-out (N)	1335	1780	2230	2670

TR-PFS2 - Recommended for use in sheet hardness: HRB 80 or less

TR-PFC2 - Recommended for use in sheet hardness: HRB 70 or less

