


# Captive Screw Panel Fastener TR-PF11

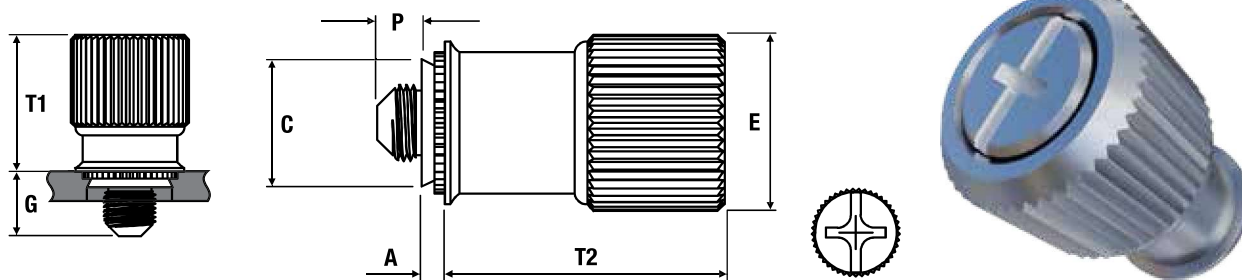

## Metric Dimensions

Nickel Plated Heat Treated Steel (Retainer), Aluminium (Knob), Stainless Steel (Screw & Spring): TR-PF11

Thread	M3			M4			M5			M6
Screw length code	0	1	2	0	1	2	0	1	2	2
A max.	0.92			0.92			0.92			0.92
Min. sheet thickness	0.92			0.92			0.92			0.92
Recommended hole size +0.08	5.56			7.92			7.92			9.53
C max.	5.54			7.90			7.90			9.50
E ±0.25	10.59			13.06			13.06			14.61
G ±0.64	4.32	5.84	7.37	5.84	7.37	8.89	5.84	7.37	8.89	10.41
P ±0.64	0	1.52	3.05	0	1.52	3.05	0	1.52	3.05	3.05
T1 nom.	7.87			11.43			11.43			13.46
T2 nom.	11.43			16.26			16.26			20.07
Driver size	PH1			PH2			PH2			PH3
Min. distance to edge of sheet	7.11			8.38			8.38			11.68

## Metric Performance Data

Thread	M3	M4	M5	M6
Test sheet material	Steel			
Installation (kN)	11.1	20.0	20.0	22.2
Push-out (N)	645	710	710	865

TR-PF11 - Recommended for use in sheet hardness: HRB 80 or less

