


Low Profile Cross Recess Panel Fastener TR-PF50

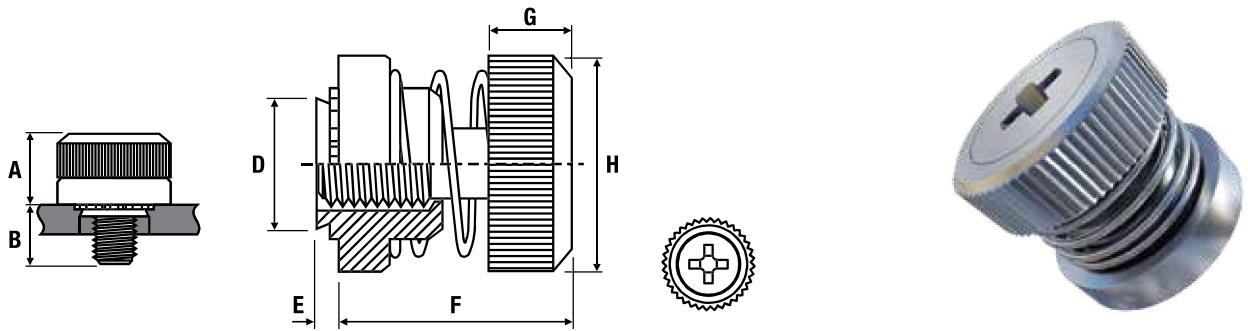

Metric Dimensions

Zinc Plated Steel: TR-PF50

Thread	M3		M4		M5	
	0	1	0	1	0	1
Screw code						
A max.	8.64		8.64		9.15	
B ± 0.64	5.84	7.37	5.84	7.37	5.84	7.37
C min. sheet thickness	0.8		0.8		0.8	
D max.	5.48		6.38		7.98	
E $+0.4 / -0.13$	0.77		0.77		0.77	
F nom.	13.21		13.46		13.46	
G ± 0.2	5.26		5.51		5.72	
H $+0.4 / -0.13$	10.3		11.9		13.5	
Recommended hole size $+0.08$	5.5 - 5.58		6.4 - 6.48		8 - 8.08	
Min. distance to edge of sheet	6.6		7.4		8.4	

Metric Performance Data

Thread	M3	M4	M5
Test sheet material	Steel		
Installation (kN)	22.2	26.7	35.6
Push-out (N)	400	400	423

TR-PF50 - Recommended for use in sheet hardness: HRB 60 or less

www.trfastenings.com

Go to our website to view preferred ranges, download 3D models and view installation animations

