
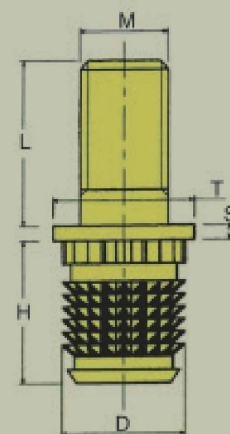
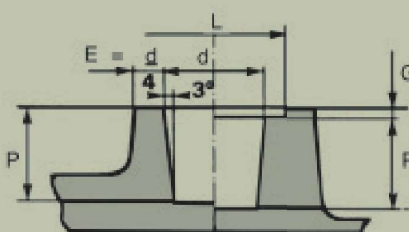
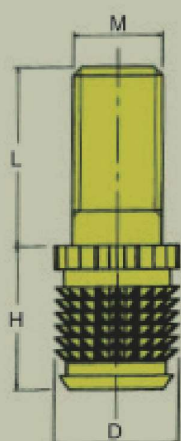


INSERTO PARA TERMOPLÁSTICOS

Inserción por CALOR o ULTRASONIDOS

Pernos SERPLAST - GTH / GTHC

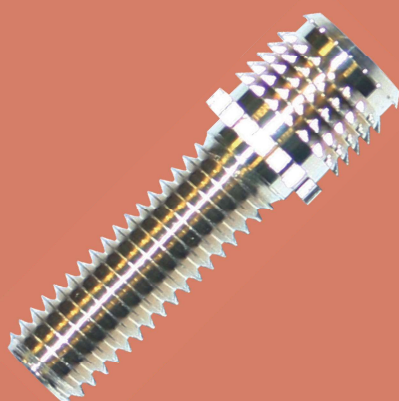

Rosca	REF.	REF.	Longitud	D	Longitud perno	T	Esp.	Dimensiones del alojamiento				
								d	P min.	E min.	L min.	G
M3	40/GTHM03L05	40/GTHCM03L05	5.5	4.5	5	6	0.5	4	7	1.1	6.2	0.5
	40/GTHM03L10	40/GTHCM03L10			10							
	40/GTHM03L15	40/GTHCM03L15			15							
M4	40/GTHM04L05	40/GTHCM04L05	7.5	6	5	7.5	0.8	5.4	9	1.4	7.7	0.8
	40/GTHM04L10	40/GTHCM04L10			10							
	40/GTHM04L15	40/GTHCM04L15			15							
M5	40/GTHM05L10	40/GTHCM05L10	8	7	10	8	0.8	6.4	9.5	1.7	8.2	0.8
	40/GTHM05L15	40/GTHCM05L15			15							
	40/GTHM05L20	40/GTHCM05L20			20							
M6	40/GTHM06L10	40/GTHCM06L10	9	8.5	10	10	0.8	7.9	11	2	10.2	0.8
	40/GTHM06L15	40/GTHCM06L15			15							
	40/GTHM06L20	40/GTHCM06L20			20							
M8	40/GTHM08L15	40/GTHCM08L15	11	10	15	12	1	9.4	13	2.4	12.2	1
	40/GTHM08L20	40/GTHCM08L20			20							
	40/GTHM08L25	40/GTHCM08L25			25							

Disponemos de Máquina manual o semiautomática de colocación térmica, CONSULTAR.

NOTA: * Debido a la diversidad de longitudes, se fabrican bajo pedido. CONSULTAR.