


# INSERTO PARA TERMOPLÁSTICOS

## Inserción por CALOR o ULTRASONIDOS

SERPLAST - TH

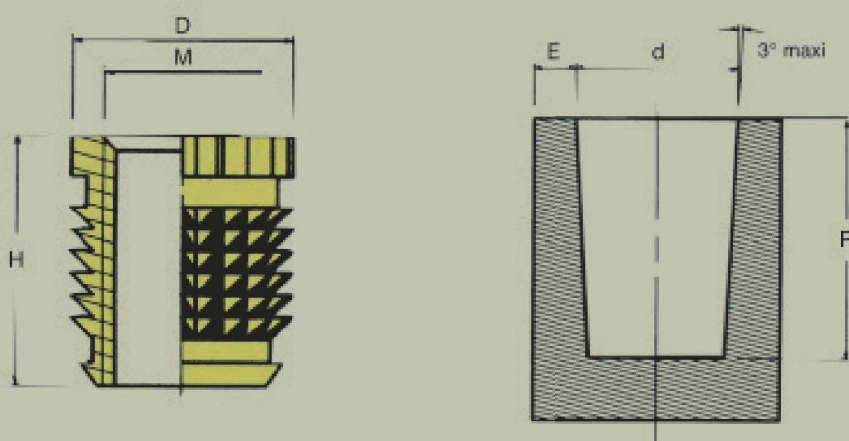

Rosca	REF:	Longitud H	Ø D	Dimensiones del alojamiento		
				d	P min.	E min.
M2	40/TH020H040	4	4	3.5	5.5	1
M2,5	40/TH025H050	5	4	3.5	6.5	1
M3	40/TH030H055	5.5	4.5	4	7	1.1
M3,5	40/TH035H060	6	5.5	5	7.5	1.3
M4	40/TH040H075	7.5	6	5.4	9	1.4
M5	40/TH050H080	8	7	6.4	9.5	1.7
M6	40/TH060H090	9	8.5	7.9	11	2
M8	40/TH080H110	11	10	9.4	13	2.4
M10	40/TH100H130	13	12	11.3	15.5	2.9

Disponemos de máquina manual o semiautomática de colocación térmica. CONSULTAR