
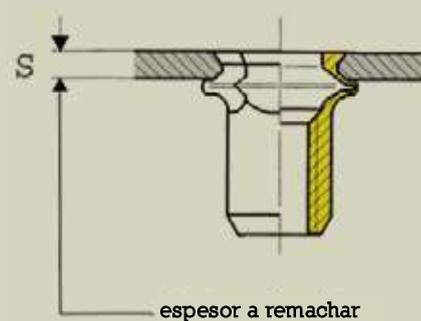
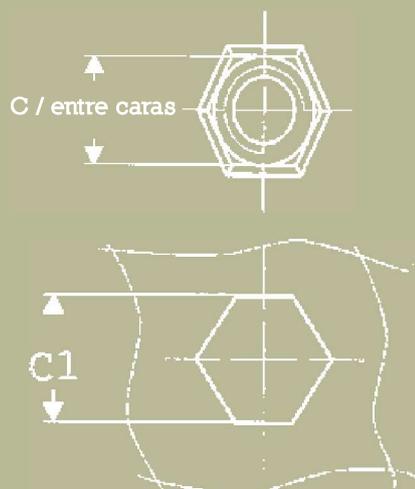


# SERFIN

## CABEZA REDUCIDA SEMI-HEXAGONAL ABIERTO ACERO Cincado Plateado TIPO SH-FR



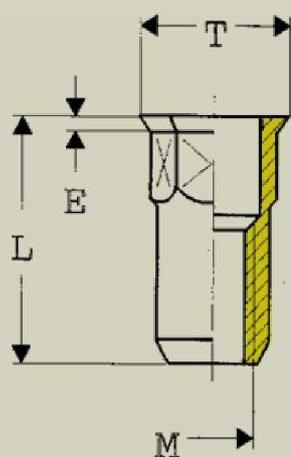


ROSCA ISO	REF. ACERO	espesor a remachar	entre caras	E	perforación (0,1)	T	L
M		S	C		C1		
M3	SH3FR	0,5 à 2	4.9	0.5	5	6	9.3
M4	SH4FR	0,5 à 2	5.9	0.5	6	6.8	10.5
M5	SH5FR	0,5 à 3,0	6.9	0.5	7	8	11.7
M6	SH6FR	0,5 à 3,0	8.9	0.5	9	10	14.5
M8	SH8FR	0,5 à 3,0	10.9	0.5	11	14	16.5
M10	SH10FR	1,0 à 3,5	12.9	0.8	13	14.2	20

\* Los espesores a remachar indicados en esta tabla no son límites. Bajo demanda podemos fabricar SERBLOC / SERFIN atendiendo vuestras necesidades (Ejemplo, M14, M16 + Latón). Estos datos están sujetos a posibles modificaciones.

# SERFIN

## CABEZA REDUCIDA SEMI-HEXAGONAL ABIERTO INOX TIPO SH-FRX

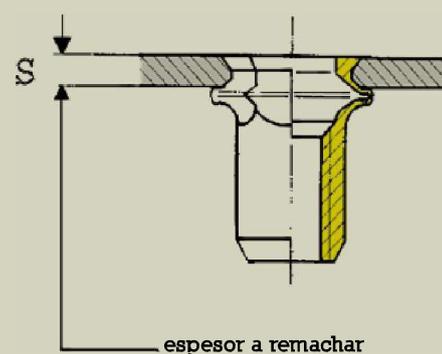
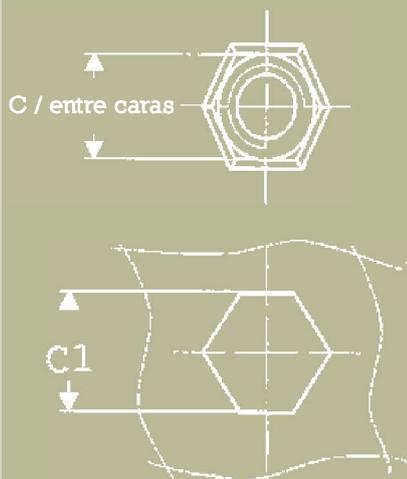
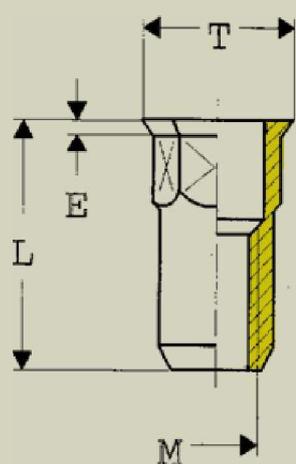


ROSCA ISO	REF. ACERO	espesor a remachar	entre caras	E	perforación (-0,1)	T	L
M		S	C		C1		
M3	SH3FRX	0,5 à 1,5	4.9	0.35	5	5.6	8.5
M3	SH3LFRX	1,5 à 2,5	4.9	0.35	5	5.6	10
M4	SH4FRX	0,5 à 2,5	6	0.5	6.1	7	11
M5	SH5FRX	0,5 à 3,0	7	0.5	7.1	8	12
M6	SH6FRX	0,5 à 3,0	9	0.5	9.1	10	14
M8	SH8FRX	0,5 à 3,0	11	0.5	11.1	12	16
M10	SH10FRX	1,0 à 3,5	13	0.7	13.1	14.2	19

\* Los espesores a remachar indicados en esta tabla no son límites. Bajo demanda podemos fabricar SERBLOC / SERFIN atendiendo vuestras necesidades (Ejemplo, M14, M16 + Latón). Estos datos están sujetos a posibles modificaciones.

# SERFIN

## CABEZA REDUCIDA SEMI-HEXAGONAL ABIERTO INOX A4 TIPO SH-FRX-A4

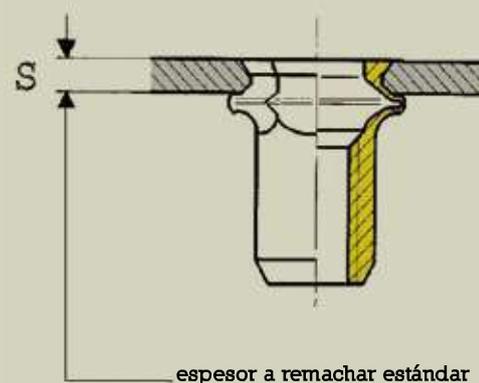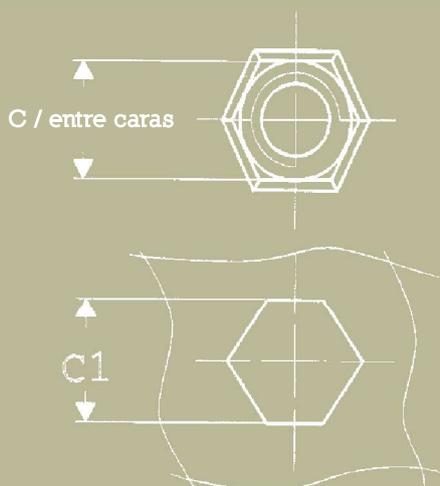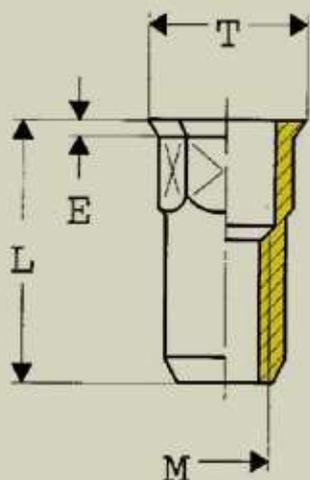

ROSCA ISO	REF. ACERO	espesor a remachar	entre caras	E	perforación	T	L
M		S	C		C1 (-0,1)		
3	SH3FRXA4	0,5 à 1,5	4,9	0,35	5	5,6	8,5
4	SH4FRXA4	0,5 à 2,5	6	0,5	6,1	7	11
5	SH5FRXA4	0,5 à 3,0	7	0,5	7,1	8	12
6	SH6FRXA4	0,5 à 3,0	9	0,5	9,1	10	14
8	SH8FRXA4	0,5 à 3,0	11	0,5	11,1	12	16
10	SH10FRXA4	1,0 à 3,5	13	0,7	13,1	14,2	19

\* Los espesores a remachar indicados en esta tabla no son límites. Bajo demanda podemos fabricar SERBLOC / SERFIN atendiendo vuestras necesidades (Ejemplo, M14, M16 + Latón). Estos datos están sujetos a posibles modificaciones.